


Installation – Window Reveal II

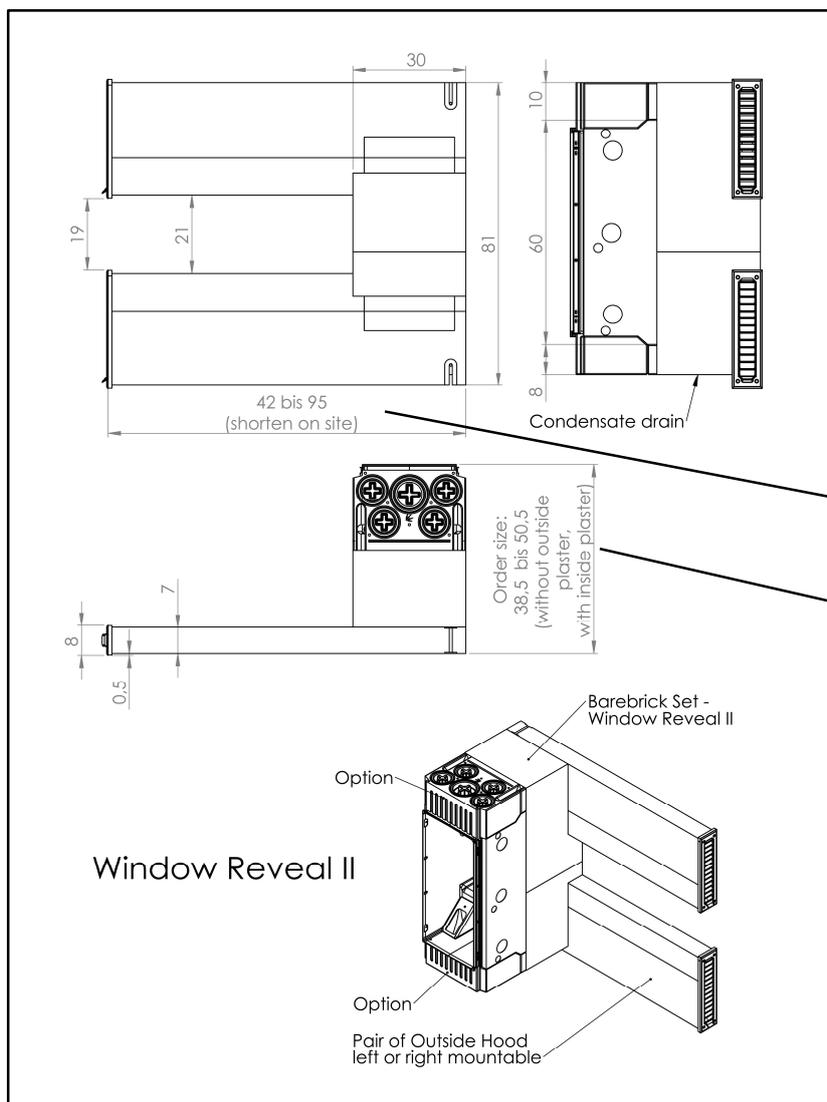

Articles needed

- FA00.124_: Bare brickwork set window reveal II
- FA00.1045: Outside hoods window reveal II
- FA00.1240: Shorten freeAir 100 and preparation for window reveal II

Installation position of wall box has to be kept exactly (+/- 1 cm)

Lateral length of air ducts will be customized on site


Depth will be shortened in factory (please notice in order)

After installing the bare brickwork set and the following sealing and insulation works the outside hoods have to be adapted and installed



Please remove red construction time closure cover

Use the deepened lines to cut off just one connection opening

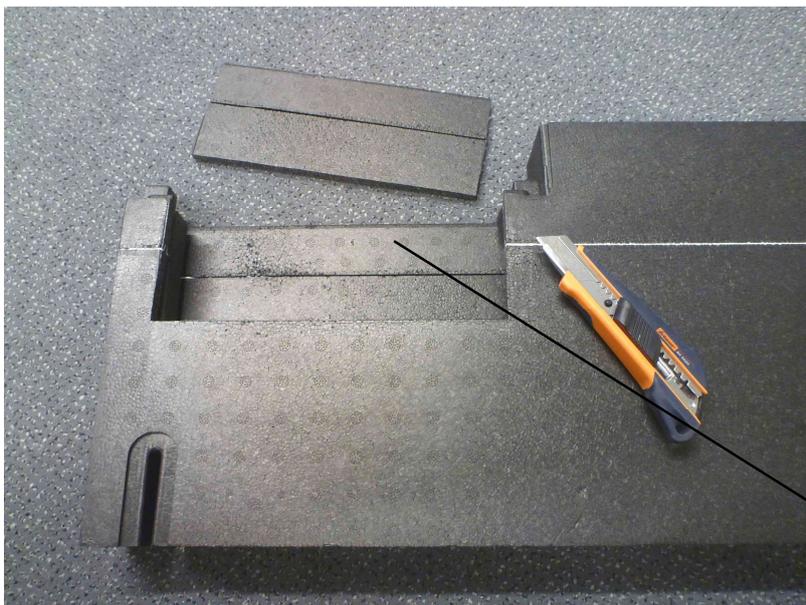


Take care to choose correct side:
left or right!

Assure water and air tight glueing of bare brickwork set with lateral air ducts of outside hoods




Authorized sealant:
Ottocoll M500

Insert air ducts into bare brickwork set on fitting position and fix both with screws

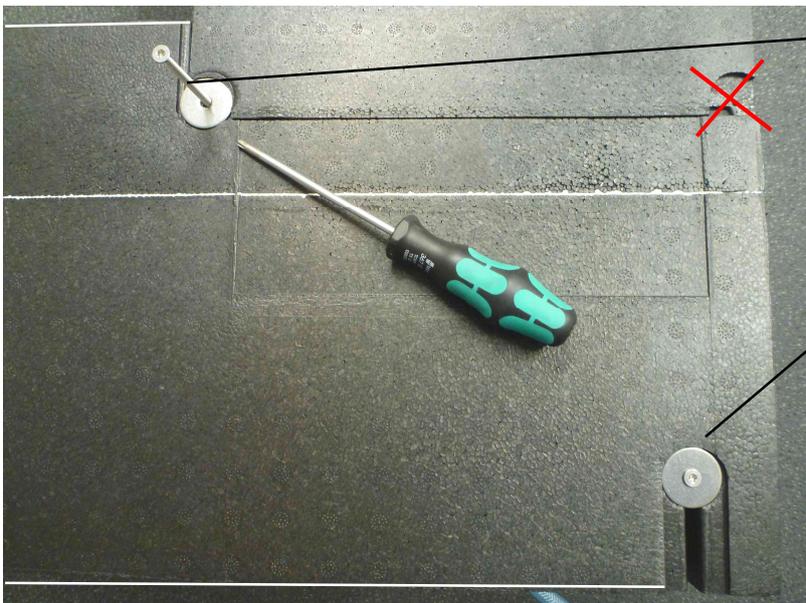


Please use 2 pcs
4,5x80 countersunk
screws just for
fixation

Screw needs to be
fed into black **dowel**:



Cut off ends of air ducts flush with plaster

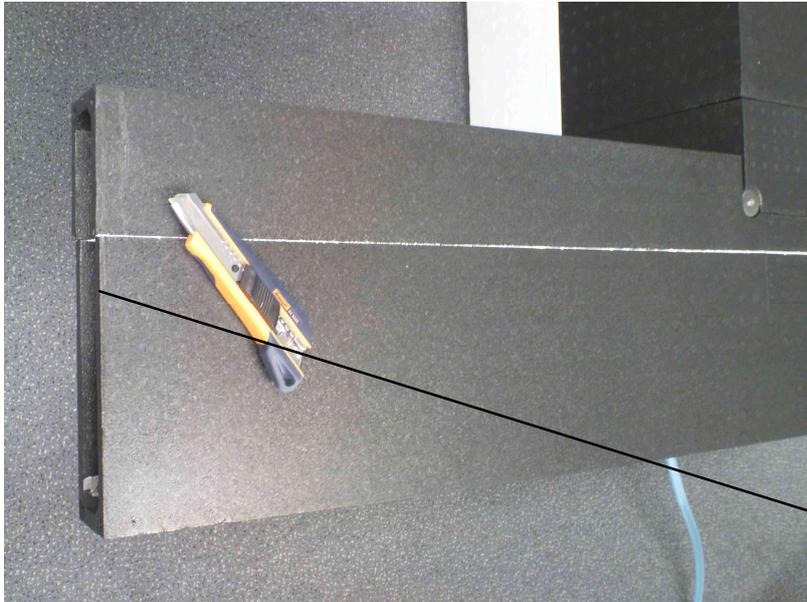


Adjust air duct length according outer plaster level

Attach construction time closure sheet to protect air duct opening; after plastering, please use sheet as drilling template




Pre-drill 5mm holes for 4 dowels

Screw dowels straight and carefully into pre-drilled holes

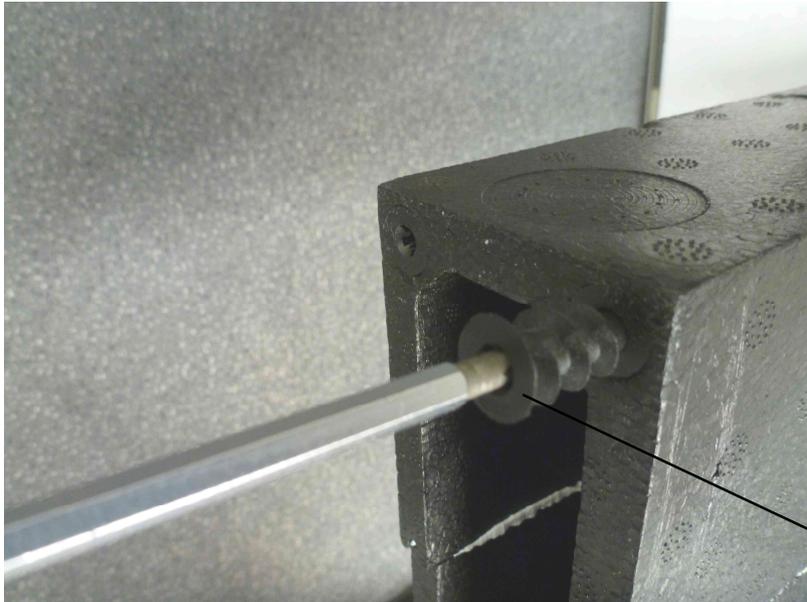

4 pcs bluMartin
dowels

Attach condensate drain sealing tape

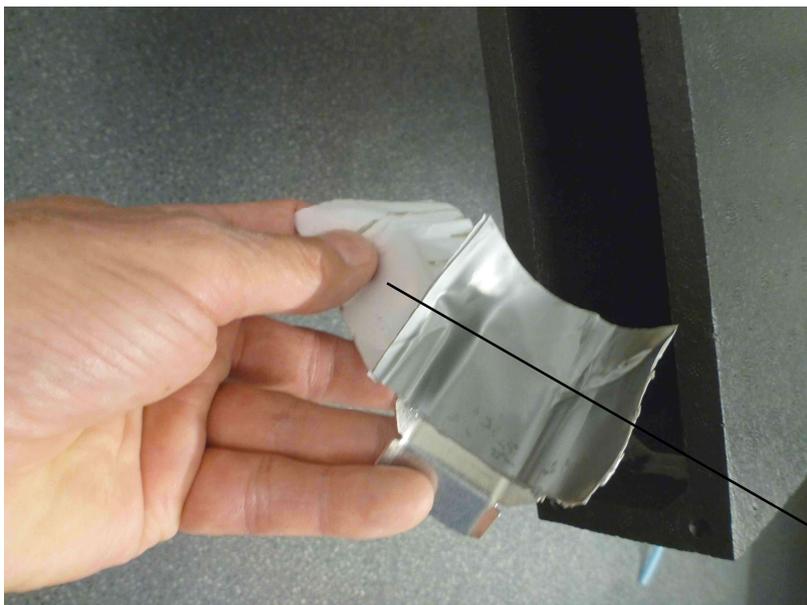


Pull off release film
from sealing tape

Press PE-Butyl-sealing tape firmly to inner air duct walls to guarantee watertightness



Pay attention that
condensate drain
juts out from air duct

Attach front grill frame watertight to facade

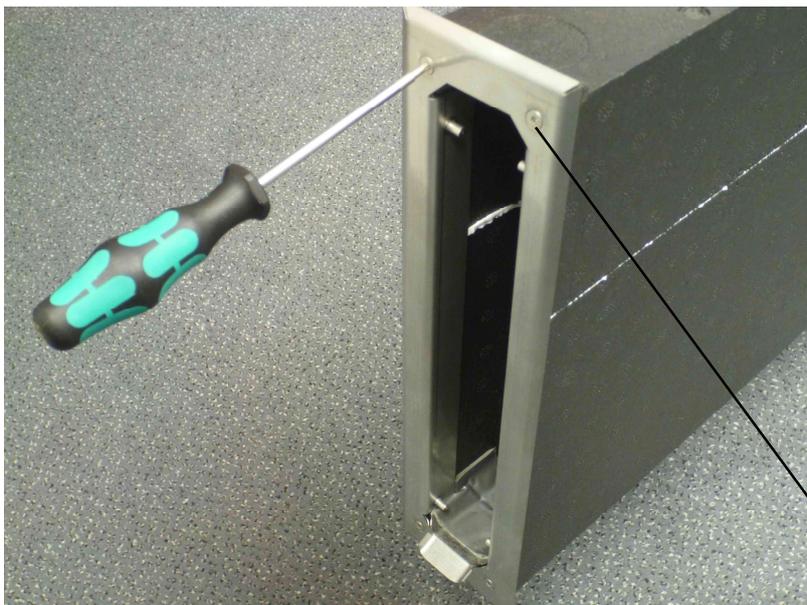


4 pcs 3,5x30
countersunk screws

Insert front grill on upper hooks and fold down



For locking, press grill into bottom fixation position

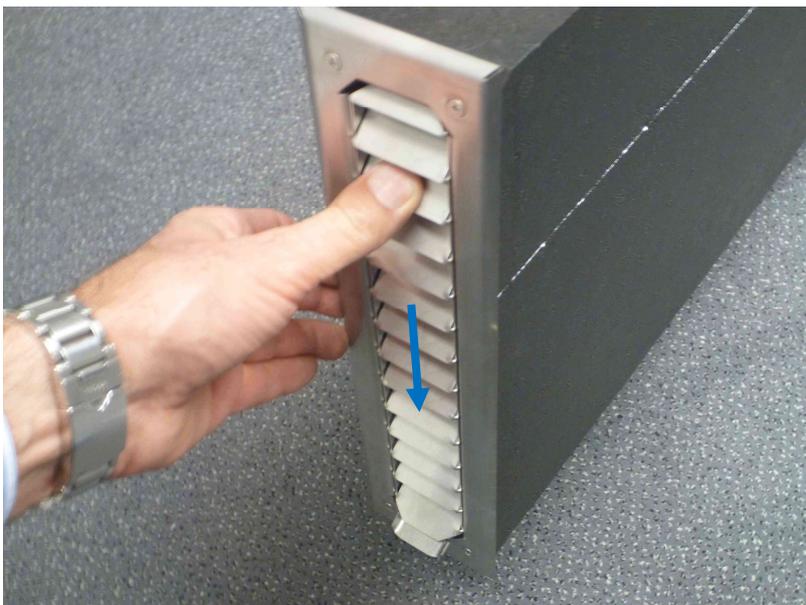

Slide supply air filter into bare brickwork set totally, then push it upwards until fixation



Air flow arrows show downwards

Only customized freeAir units are allowed to be installed into window reveal II



freeAir 100 with shortened EPP body